

Qmax

High Flow – High Performance – Single Stage Midship Muscle Pump

- Exclusive High-5 Five Year Warranty covers parts and labor for the first two years and parts for an additional three years.

- “G” style heavy duty gearbox sufficient to handle 16,000 lb. ft. of drive line torque standard; optional “K” gearbox provides 18,500 lb. ft. of drive line torque.

- Up to fourteen (14) 3” discharge ports and up to five (5) 4” discharge ports.

- Eight (8) 3” suction ports. Additional options: up to four (4) 6” ports and up to two (2) 4” tank to pump ports.

- Extra large tank to pump line opening capable of flows over 1100 GPM.

- 6” rear intake option with available Master Intake Valve.

- Full flow waterways cut friction losses and deliver maximum pressure at discharge valves.

- Large suction inlets and double suction impeller delivers pump capacities beyond NFPA 1901 standard ratings and up to 3000 GPM from a sufficient positive pressure water source and an appropriate engine.

- Designed specifically to increase the efficiency of water flow in a compact package.

- Auto Lube bearing system automatically lubricates front pump bearing with oil and eliminates need for second set of pump packing or mechanical seal.


- Shaft sealing options: Either pump packing or mechanical seal.

- One-piece body provides smooth, efficient waterways and better access to packing making routine maintenance easier.

- Qmax can be equipped with universal valve extensions to mount all popular fire service valves.

“G” Style Gearbox

The most popular gearbox in the industry. Highly developed gears provide smooth and reliable shifting from road to pump position. The entire gearbox can be removed without disturbing the impeller gear of the main pump body.

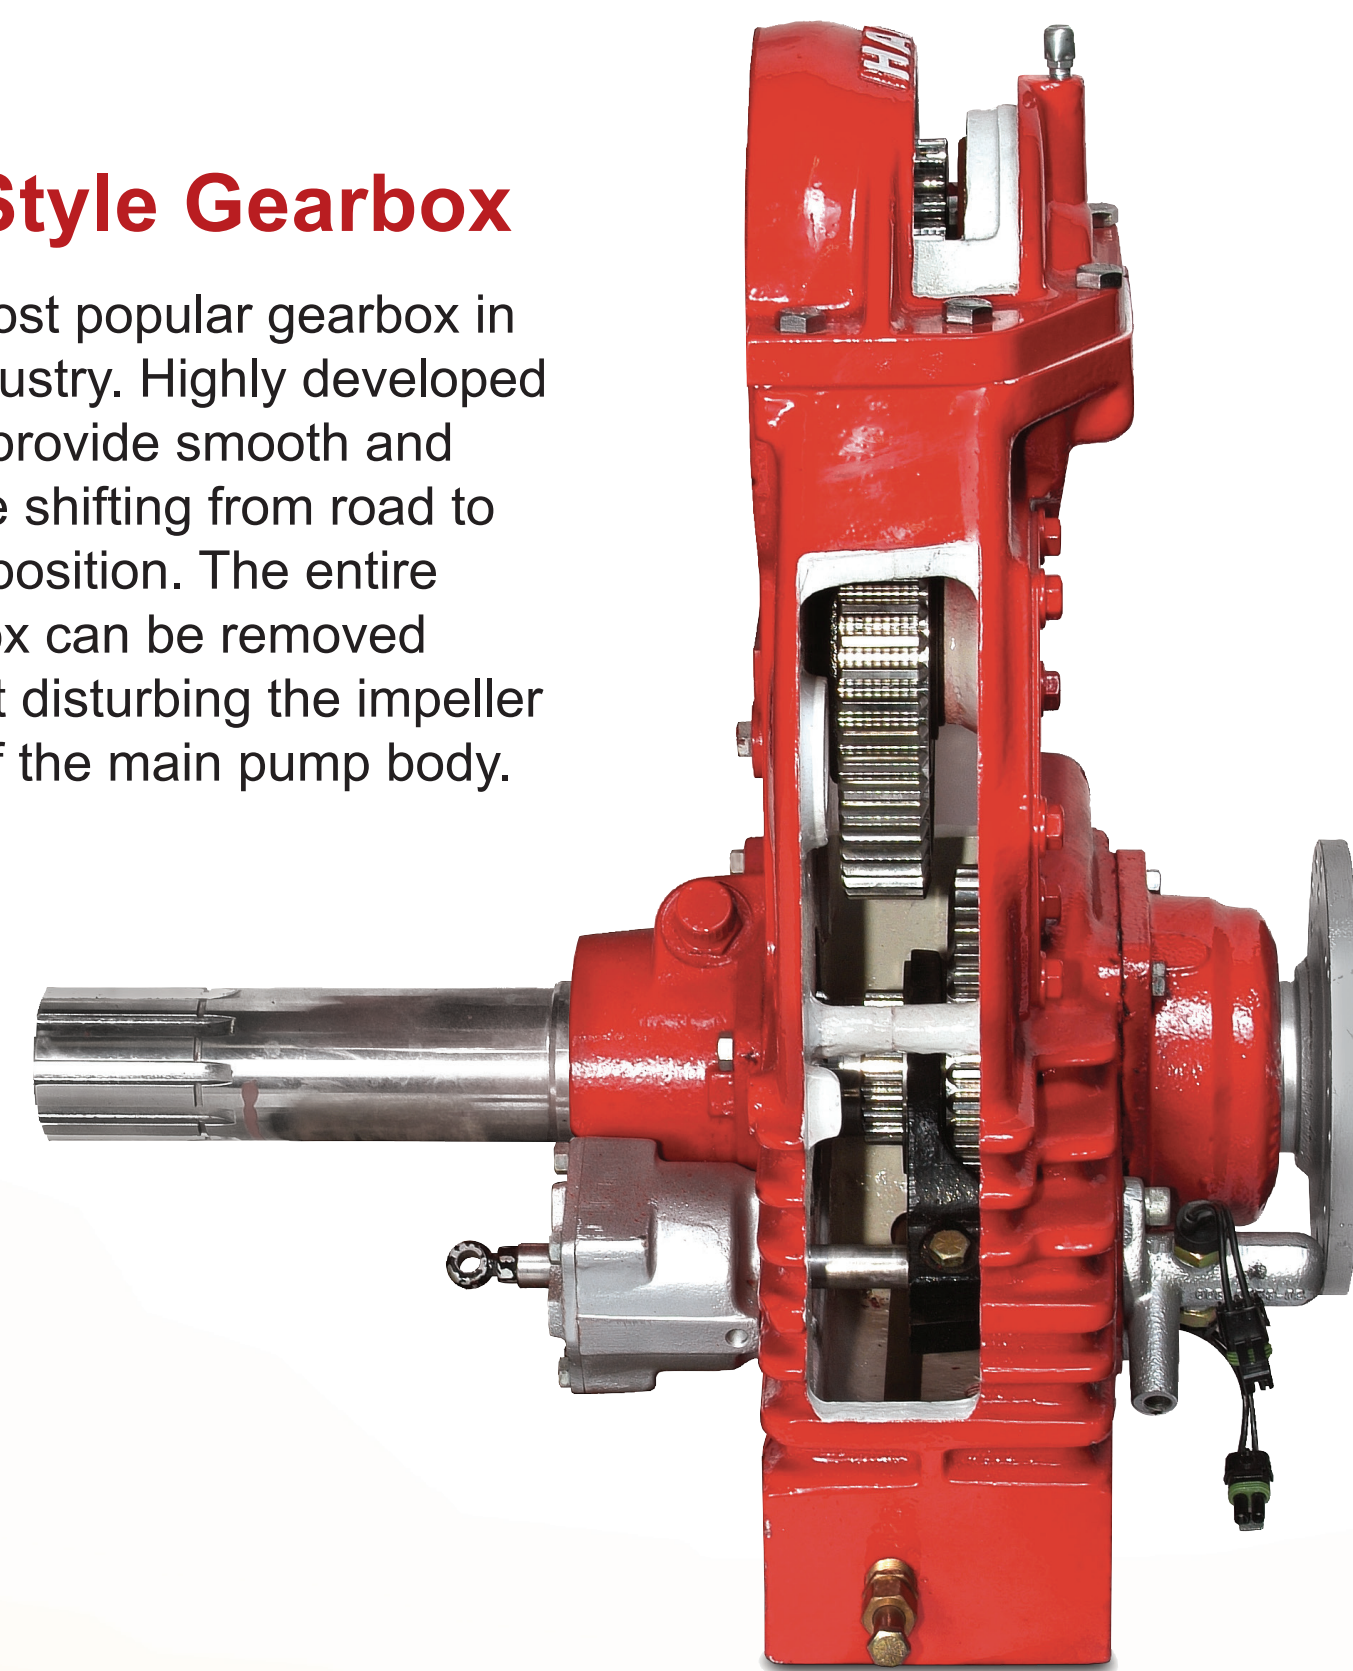

TRV Thermal Relief Valve



Intake Relief Valve

Four Inch LDH Discharge Ports

Discharge Relief Valve

Total Pressure Master

Rigid One Piece Main Pump Body

Dual Tank to Pump Connections Available

SPV Primer

Anode System

Balanced Double Suction Impeller

Master Intake Valve

“K” Style Gearbox

Heavy duty optional gearbox with the strongest yet quietest gear drive available.

ESP Primer

MAX FLOWS – NFPA ratings to 2250 GPM; Maximum flows to over 3000 US GPM.
MAX EFFICIENCY – 1750 NFPA rating from an appropriate 330 HP engine. Computer designed and tested for maximum performance.
MAX RELIABILITY – Tough single-piece body, 600 PSI hydrostatic tested; Simple, durable construction.



Performance you can trust. First time. Every time.

Hale Products Inc. | 607 NW 27th Avenue | Ocala, Florida 34475 | P: 800.533.3569 | F: 800.520.3473

WWW.HALEPRODUCTS.COM